


PNF

USER MANUAL

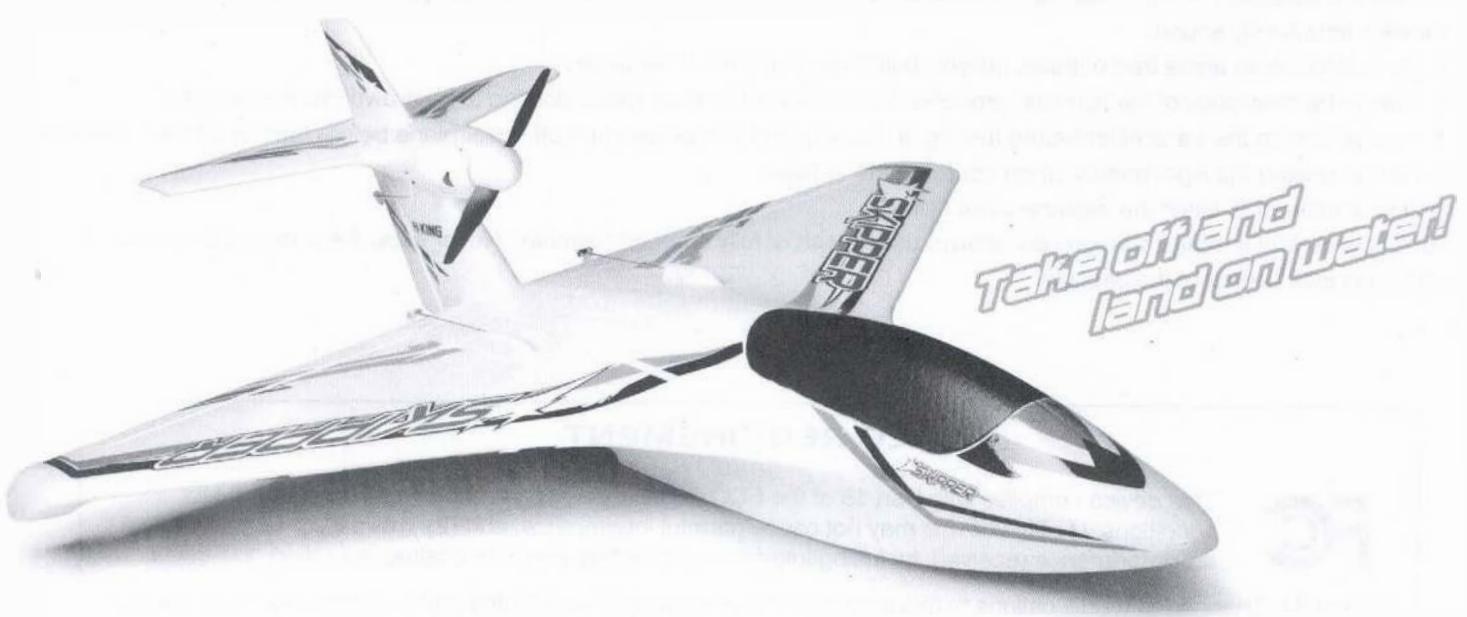

INCLUDED:

1. Almost completely assembled EPO fuselage and wings.
2. 40A brushless power system - waterproof ESC W/BEC.
3. 9g waterproof servo x 4.
4. Nylon propeller (2pcs).



INSTRUCTION MANUAL

THIS MODEL IS NOT A TOY!

THESE INSTRUCTIONS SHOULD BE READ BY A SUPERVISING ADULT

HobbyKing Skipper All Terrain Launching Airplane PNP

Model No:40228

WARNINGS

IMPORTANT: Before beginning assembly, please read and understand the warnings listed following. Failure to read and understand these warnings could lead to bodily harm and/or injury.

1. This model is not a toy. It is for beginner, intermediate and experienced modeller
2. Assemble the plane according to the instructions. Do not alter or modify the model. If you make any modifications, you will void your warranty.
3. It is highly recommended to fly this model under the guide of experienced modeller
4. Test the operation of the model before each flight to insure that all equipment is operating properly, and that the model remains structurally sound.
5. Fly in large open areas free of trees, people, buildings or any other obstacles.
6. Always be conscious of the spinning propeller. Be careful not to allow loose clothing to be drawn into the propeller.
7. Always turn on the transmitter before turning on the airplane and always turn off the airplane before turning off the transmitter.
8. Always unplug the flight battery when not flying the airplane.
9. Do not attempt to catch the airplane while flying.
10. It is important to make sure you are always using fresh or fully charged batteries. Never allow the batteries to run low or you could lose control of the airplane.

FCC REQUIREMENT



This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) This device must accept any interference received, including interference that may cause undesired operation.

CAUTION: Changes or modifications to this product not expressly approved by the party responsible for compliance may void the user's authority to operate the equipment.


CE 1622 !




KIT CONTENTS



Fuselage



Left wing Right wing



Right horizontal tail
Left horizontal tail



Electronic compartment hatch



Battery compartment hatch



6*4*400mm carbon fiber tube
6*4*200mm carbon fiber tube
3*1.4*120mm carbon fiber tube



Y wire cord



Push rod for horizontal tail



1.5mm Allen key



Cohere sticker for horizontal tail
Battery velcro



Spare 6*4 propeller



Ballon

ITEMS REQUIRED FOR COMPLETION

2.4GHz 4CH Transmitter and Receiver.




11.1V 1300mAh 35C LiPo pack. (Battery capacity can be from 1300mAh to 2200mAh)

2S/3S Balance charger with adapter.



Please note: It is important to thoroughly clean and prepare the foam surface of this model before using the tape to adhere the elevators to the wings. Also ensure that the temperature of the room/workshop is sufficient to aid proper adhesion.

ASSEMBLING YOUR SKIPPER



1. Remove battery compartment hatch and electronic compartment hatch as photos show.
2. Rip off the double side tape on the left wing as photos show.

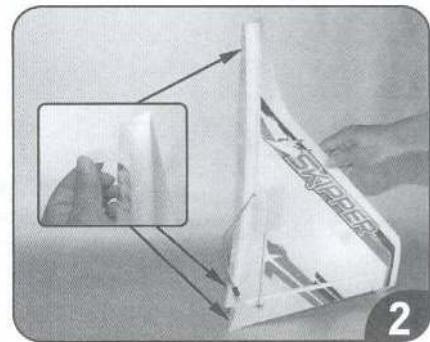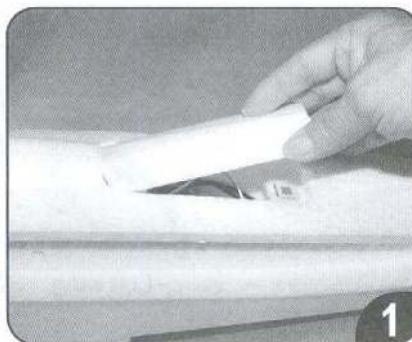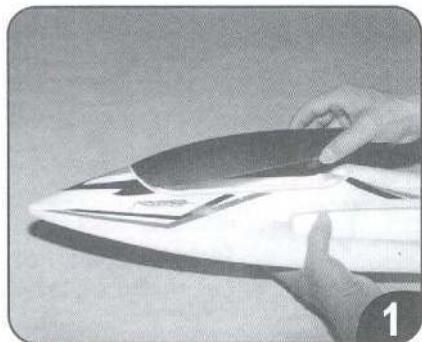



3. Insert servo extend wire into the fuselage hole. plug in left wing with fuselage and press them together so that double sided tape can secure them.

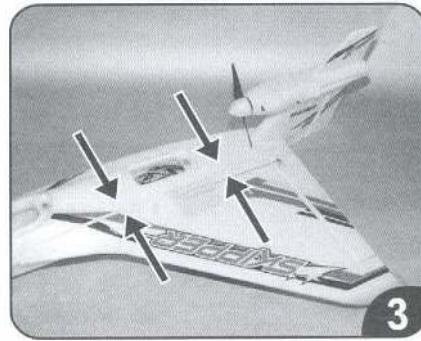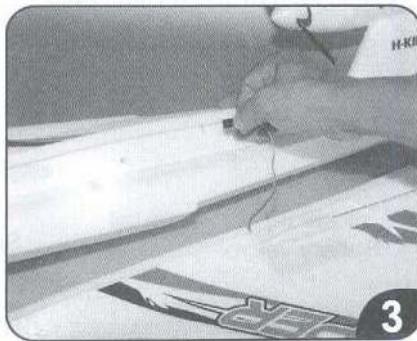



4. Insert 6*3*200mm carbon fiber tube from right side of fuselage through wing as photo show.
Follow the above way to insert 6*3*400mm carbon fiber tube on fuselage through wing.

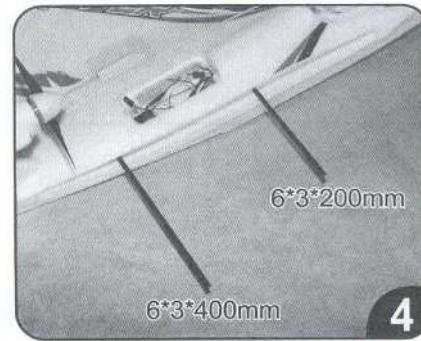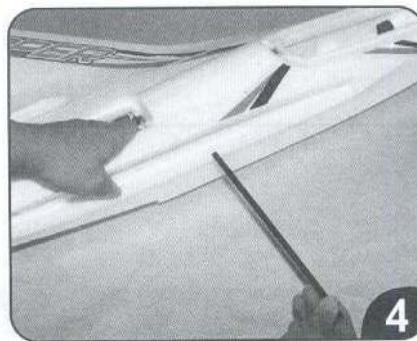




5. Rip off right wing double side tape, align carbon fiber tube with two holes on right wing side and press right wing to join fuselage. before they join together, make sure the servo extend wire get through the hole on fuselage. the servo extend wire can't be stuck when right wing join with fuselage.

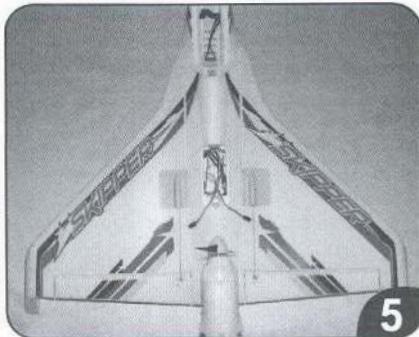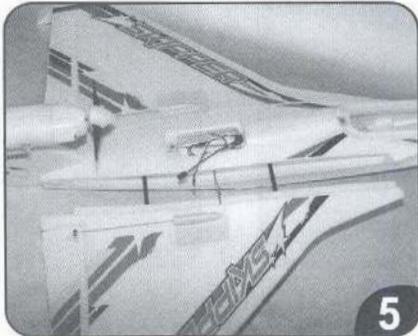




6. plug in the two servo extend wire on wings with Y wire cord which has Aileron marking label.
Noticing the servo wire correct polarity.

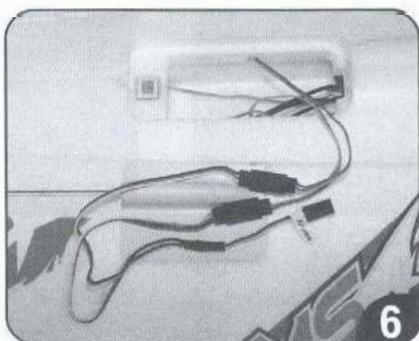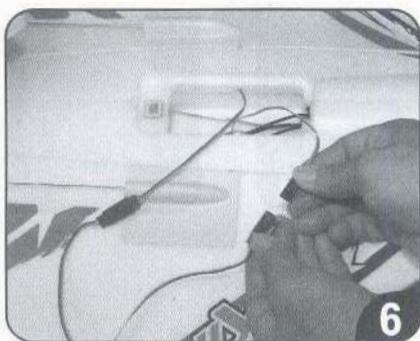



7. Insert left horizontal tail into left side of fuselage as show.
8. Insert 3*1.4*120mm carbon fiber tube from right side fuselage through left horizontal tail as show.
9. Align two carbon fiber tubes with two holes on right horizontal tail and install right horizontal tail.

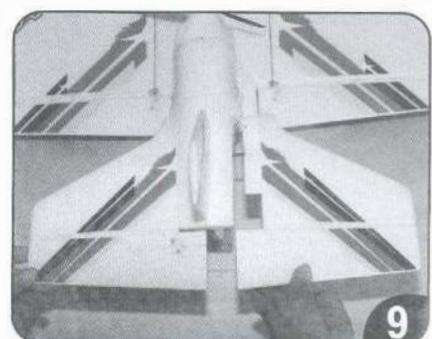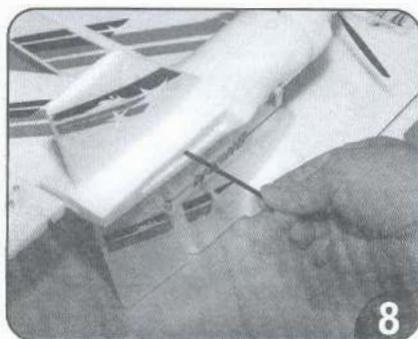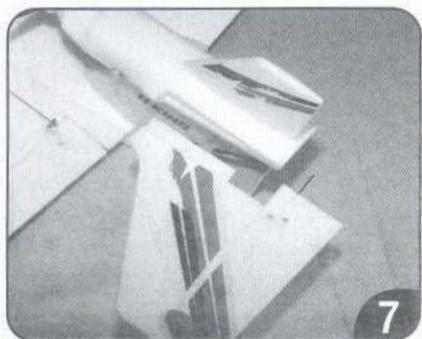

8. Use two pcs of cohore sticker to join two horizontal tails together up and down.

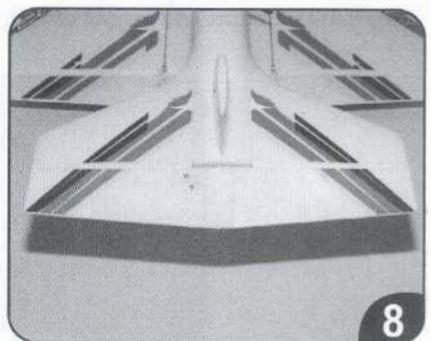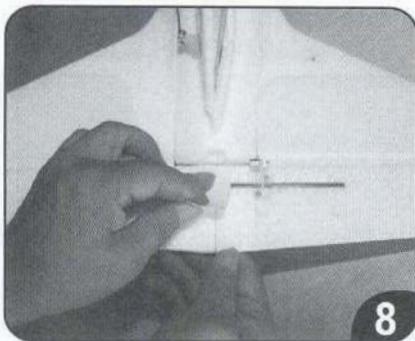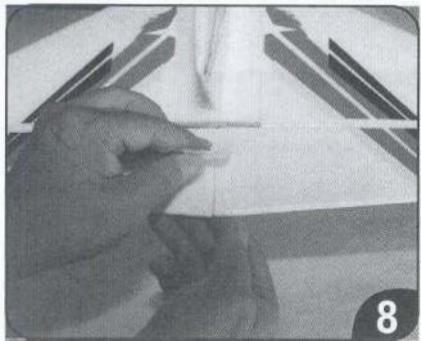


9. Insert Z shape end of pushrod into the outer hole of servo arm as show. The other end of pushrod get through the clevis and secure it with 1.5mm allen key as show. make sure horizontal tail are in neutral position.

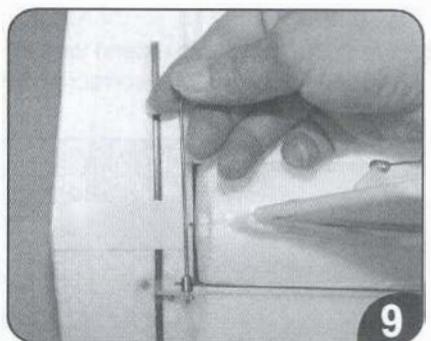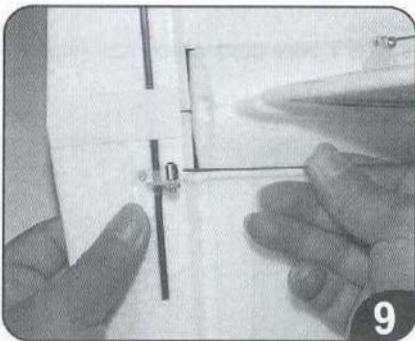

Servo wires connecting to Receiver (Apply to MODE 1 and MODE 2)

1. Plug in Aileron servo wire with Channel 1.
2. Plug in Elevator servo wire with Channel 2.
3. Plug in Throttle wire with Channel 3.
4. Plug in Rudder servo wire with Channel 4.
5. Wrap receiver with supplied balloon and place it well inside the electronic compartment. then reinstall the hatch.

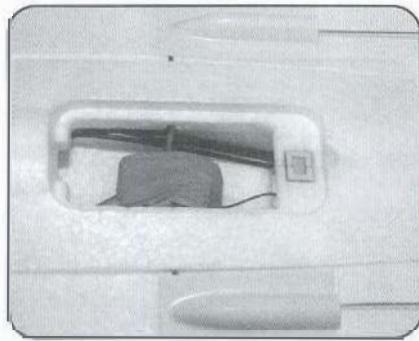

PREPARATION BEFORE FLIGHT

Step 1: Installing the radio system

1. Install the receiver into the model and connect the servo leads appropriately.
2. Bind your transmitter and receiver and ensure all servos and the ESC is functioning correctly.

STEP 2: CHARGING THE LIPO PACK (NOT INCLUDED)

The following parts are optional purchasing parts.

11.1V 1300mAh 35C LiPo pack.

2S/3S Balance charger with adapter




NOTE: Familiarize yourself with the charging procedure of the lipo battery. Read the charger Manual completely and fully charge the lipo battery.

1. Only use a LiPo approved charger. Never use a NiCd/NiMH peak charger!
2. Never leave the battery unattended during the charging process. Always keep this charger out of reach of children.
3. Stop charging immediately if any abnormality occurs, such as power indicator is off, the temperature of the battery raise rapidly.
4. Do not attempt to disassemble the charger
5. Do not set the charger on carpet during the charging process.
6. Un-plug the charger DC Adapter from the vehicles's cigarette lighter if you do not intend to use it for a period of time.

STEP 3: INSTALLING THE LIPO PACK

IMPORTANT Always turn on the transmitter before turning on the airplane and always turn off the airplane before turning off
CAUTION: the transmitter.

1. Push down the throttle stick (Left Stick, MODE 2) till the end. Then turn on the transmitter by pressing on the power switch.
2. Put LiPo pack inside the fuselage, using hook and loop strap to secure them tightly on position.
3. Attach the battery connector to the matching connector of ESC. And reinstall the hatch of fuselage, making sure it is secured tightly.
4. The proper CG position should be 10mm away from the cutting edge of bottom fuselage, please refer to the picture. If not, please adjust the position of battery.

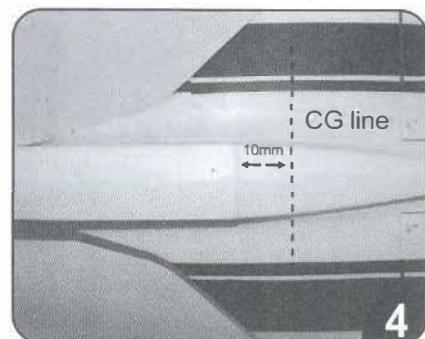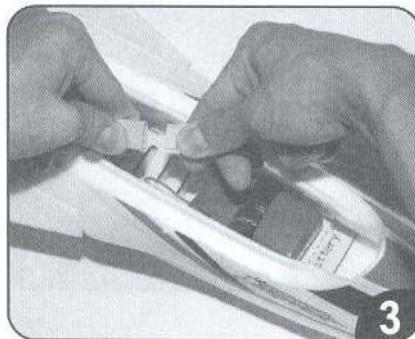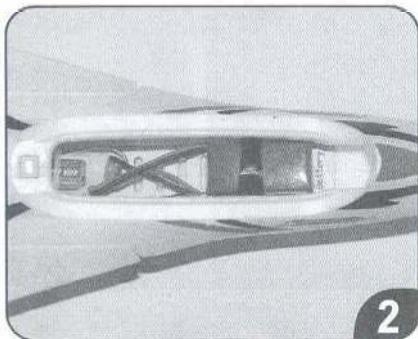


STEP 4: TEST THE THROTTLE (Mode 2)

1. Move the throttle control stick forward slowly, the motor rotates faster gradually.

NOTE: If the motor doesn't react with the throttle increasing, please check the power supply or the battery capacity and the throttle reverse switch and make necessary adjustment.

WARNING: Keep everything clear of the propeller once the battery is plugged in. Do not try to stop the propeller by hand or anything else.

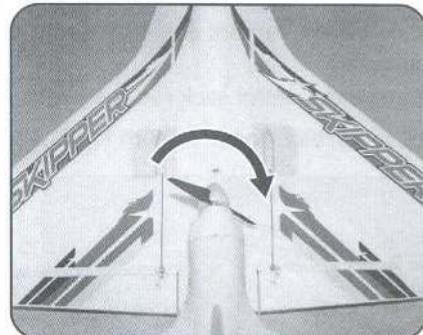

STEP 5: TEST THE AILERON (Mode 2)



1. Move the aileron control stick to the left, the left aileron moves up and the right aileron moves down.

2. Move the aileron control stick to the right, the left aileron moves down and the right aileron moves up.

NOTE: If the movement of aileron works in opposite position, please check the aileron reverse switch and make necessary adjustment.

3. Let Aileron control stick returns to its neutral position, the aileron returns to its neutral position.

NOTE: If aileron doesn't return to neutral position, then adjust the aileron trim button to make it in neutral position.

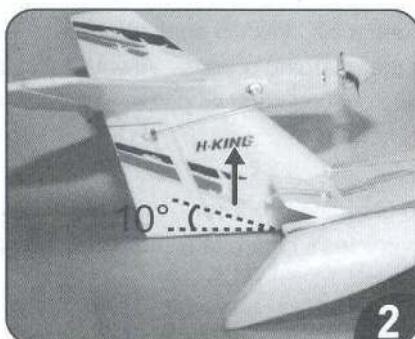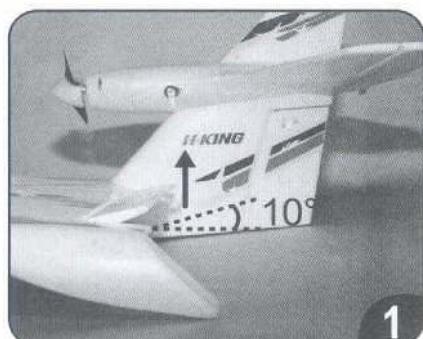

STEP 6: TEST THE RUDDER (Mode 2)



1. Move the rudder control stick to the left, the rudder turns to the left.

2. Move the rudder control stick to the right, the rudder turns to the right.

NOTE: If the movement of rudder works in opposite position, please check the rudder reverse switch and make necessary adjustment.

3. Let rudder control stick returns to its neutral position, the rudder returns to its neutral position.

NOTE: If rudder doesn't return to neutral position, then adjust the rudder trim button to make it in neutral position

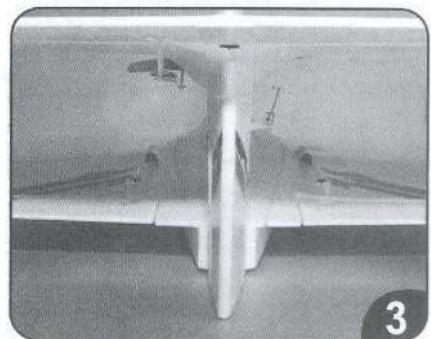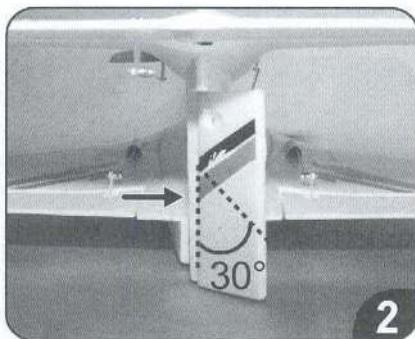

STEP 7: TEST THE ELEVATOR (Mode 2)



1. Move the elevator control stick backward , the elevator will be up

2. Move the elevator control stick forward, the elevator will be down.

NOTE: If the movement of elevator works in opposite position, please check the elevator reverse switch and make necessary adjustment.

3. Let elevator control stick returns to its neutral position, the elevator returns to its neutral position.

NOTE: If elevator doesn't return to neutral position, then adjust the elevator trim button to make it in neutral position.

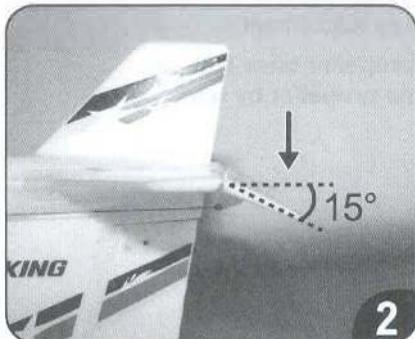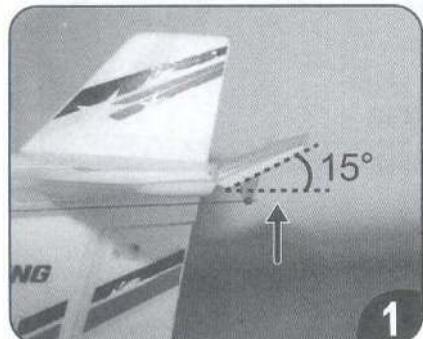

FLIGHT MANUAL

Choose a good flying site and day

1. The ideal location for flying has wide-open space in four directions with no people
2. Choose location carefully! Do not operate model near these areas: Houses or buildings, children's play areas, road traffic, railways, airports, overhead powerlines.
3. Fly in calm weather conditions with no winds or gentle winds.

WARNING: If you lose control of your airplane , never wade into deep water or water with strong currents to retrieve it.

First, hold the transmitter as high as you can to try to re-establish control. If this does not work, find another way to move closer to the model, but do not endanger yourself in the process!

Pre-flight check

1. Check the propeller and all screws are securely fastened.
2. Check airplane responds properly to control signals.
3. Test the range of the radio signal. It is recommended that have around 100 M range check.

VALUABLE EXPERIENCE

Take Off

1. Place airplane on water gently,apply half throttle,adjust rudder stick to control airplane sliding on water and facing the wind.
2. Apply full throttle and adjust rudder stick to control airplane sliding in high speed on water straightly facing the wind.
3. When airplane is sliding in high speed straightly, apply adequate amount of elevator, airplane head will raise and going to take off

NOTE: When airplane take off, immediately reduce elevator control value to control airplane ascend slowly.

Steering

1. Aileron control to steer left, move aileron stick to left, combine with a small amount of up elevator(Elevator stick down),airplane will steer left without losing altitude
2. Aileron control to steer right, move aileron stick to right, combine with a small amount of up elevator(Elevator stick down), airplane will steer right without losing altitude.
3. Rudder control to steer left, move rudder stick to left, combine with a small amount of up elevator(Elevator stick down),airplane will steer left without losing altitude
4. Rudder control to steer right, move rudder stick to right, combine with a small amount of up elevator(Elevator stick down),airplane will steer right without losing altitude










Landing

1. For your first couple of flights we recommend that you attempt to land with reserve battery power.
2. During your first flight, while at a high altitude, turn the motor off and notice how the Skipper seaplane reacts. This will give you an idea of how the airplane will react during a landing. At this higher altitude, familiarize yourself with how the model responds at low power and slower speeds as this is how the model will fly when landing.
3. To land the Skipper seaplane, fly down wind, past the landing area. Gently turn into the wind and reduce the throttle so that the airplane starts to come down. Adjust the throttle as needed to reach the landing area, but not fly past it. Always land into the wind.
4. Just before landing on water, at about 0.5 meter above the water, apply a little up elevator, This will cause the airplane to slow and settle on the water.

After Landing

Disconnect the battery, then, switch the transmitter off. Remove the battery from the fuselage, Check the airplane over to make sure nothing has come loose or may be damaged.

Command And Fly (Mode 2)

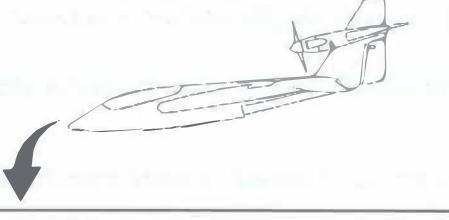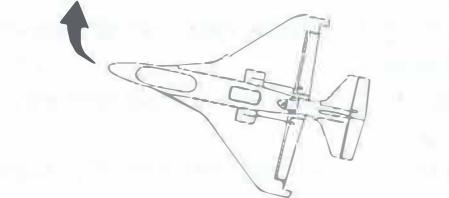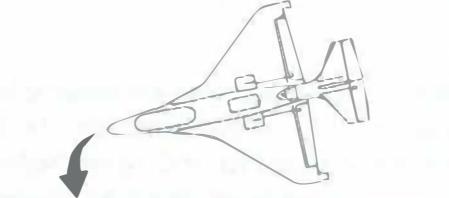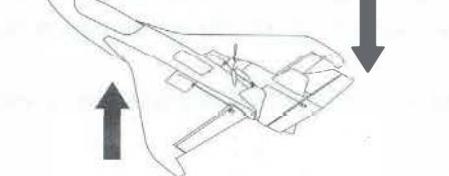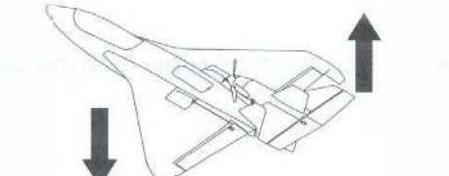Speed up			Left stick up
Speed down			Left stick down
Ascending			Right stick down
Descending			Right stick up
Nose turn right			Left stick right
Nose turn left			Left stick left
The Body incline to Right			Right Stick Right
The Body incline to Left			Right Stick Left


Adjusting trims during flight (Mode 2)



1. Let go of control sticks. If airplane moves left, adjust rudder trim to the right.



2. Let go of control sticks. If airplane moves upward, adjust elevator trim to downward.

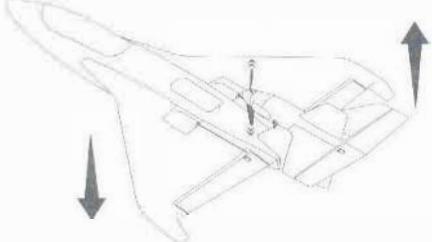

3. Let go of control sticks. If airplane inclines to the left, adjust aileron trim to the right.

4. Adjust rudder, elevator and aileron trims so airplane flies straight and horizontal when sticks are free.



Made in China